
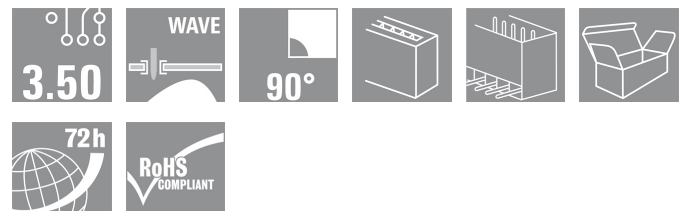


OMNIMATE Signal - series BL/SL 3.50 SL 3.50/04/90G 3.2SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

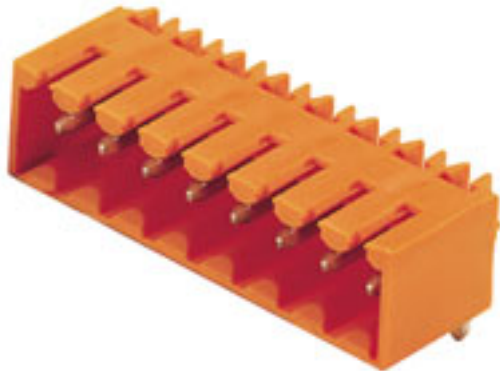

Male header with 3.50 mm pitch for wave soldering

- Plugging direction angled to the PCB (135°)
- Housing variant: screw flange (F)
- Packaged in cardboard box (BX)
- Male header can be coded

250 V (IEC) / 300 V (UL)

17 A (IEC) / 10 A (UL)

General ordering data

Order No.	1605090000
Type	SL 3.50/04/90G 3.2SN OR BX
Version	PCB plug-in connector, male header, closed side, Solder connection, 3.50 mm, No. of poles: 4, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box
GTIN (EAN)	4008190054304
Qty.	100 pc(s).
Product data	IEC: 320 V / 17 A UL: 300 V / 10 A
Packaging	Box

Creation date April 19, 2013 3:58:00 PM CEST

Catalogue status 12.03.2013 / We reserve the right to make technical changes.

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	1.141 g
------------	---------

System parameters

Product family		Mounting onto the PCB	
Product family	OMNIMATE Signal - series BL/SL 3.50	Solder connection	Solder connection
Outgoing elbow	90°	Pitch in mm (P)	3.5 mm
Pitch in inches (P)	0.138 inch	No. of poles	4
Solder pin length (l)	3.2 mm	Pin dimensions	d = 1.2 mm, Octagonal
Can be coded	Yes	Number of rows	1
Number of solder pins per pole	1	Solder eyelet hole diameter (D)	1.3 mm
Solder eyelet hole diameter tolerance (D)+ 0,1 mm		L1 in mm	10.5 mm
L1 in inches	0.413 inch	Insulation resistance	10 ³ Ω
Touch-safe protection acc. to DIN VDE 0470	IP 10	Touch-safe protection acc. to DIN VDE 57 106	Safe from back-of-hand touch


Material data

Insulating material	PBT	Colour	Orange
Insulating material group	IIIa	UL 94 flammability rating	V-0
CTI	≥ 200	Contact material	CuSn
Contact surface	tinned	Continuous operating temp., min.	-25 °C
Continuous operating temp., max.	100 °C	Max. relative humidity during storage	80 %


DIN IEC rating data

Rated current, min. no. of poles (Tu=20°C)	17 A	Rated current, max. no. of poles (Tu=20°C)	12 A
Rated current, number of poles (Tu=40°C), min	14.5 A	Rated current, number of poles (Tu=40°C), max.	10 A
Rated voltage for surge voltage class / pollution degree III/3	160 V	Rated impulse voltage for surge voltage class/ contamination degree III/3	2.5 kV
Rated voltage for surge voltage class / pollution degree III/2	160 V	Rated impulse voltage for surge voltage class/ pollution degree III/2	2.5 kV
Rated voltage for surge voltage class / pollution degree II/2	320 V	Rated impulse voltage for surge voltage class/ pollution degree II/2	2.5 kV
Short-time withstand current resistance	3 x 1s with 100 A		

CSA rating data

Institute (CSA)		Rated voltage (Use group B)	300 V
Rated current (use group B)	10 A	Rated voltage (use group D)	300 V
Rated current (use group D)	10 A		

UL 1059 rating data

Institute (UR)		Rated voltage (use group B)	300 V
Rated current (use group B)	10 A	Rated voltage (use group D)	300 V
Rated current (use group D)	10 A		

Creation date April 19, 2013 3:58:00 PM CEST

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Classifications

ETIM 3.0	EC001284	UNSPSC	30-21-18-10
eClass 4.1	27-26-07-01	eClass 5.1	27-26-07-04
eClass 6.2	27-26-07-04	eClass 7.1	27-44-04-02

Notes

- Notes
- Additional colours on request
 - Gold-plated contact surfaces on request
 - Rated current related to rated cross-section & min. No. of poles.
 - P on drawing = pitch
 - Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

Approvals

Approvals



ROHS Conform


Downloads

- CAD Library (P-CAD Format - ASCII) [SLLIA](#)
 CAD Library (P-CAD Format - Standard) [SLLIB](#)
[3-D model](#)

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

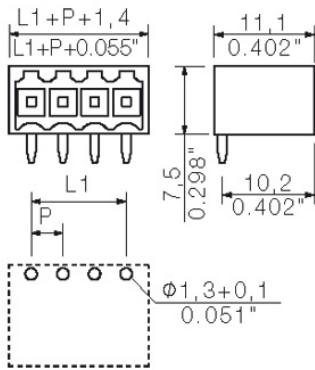

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (fully pluggable)
BL 3.5/270


Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.20 - 1.5 mm² (IEC) / 28 - 14 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 17 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1639720000	BL 3.50/04/270 SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 270°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190277277	100 pc(s).	IEC: 320 V / 12 A / 0.2 - 1.5 mm ² UL: 300 V / 8 A / AWG 28 - AWG 14	Box
1639490000	BL 3.50/04/270 SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 270°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190277048	100 pc(s).	IEC: 320 V / 12 A / 0.2 - 1.5 mm ² UL: 300 V / 8 A / AWG 28 - AWG 14	Box

BL 3.5/90


Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.20 - 1.5 mm² (IEC) / 28 - 14 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 17 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1638800000	BL 3.50/04/90 SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 90°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190276348	100 pc(s).	IEC: 320 V / 12 A / 0.2 - 1.5 mm ² UL: 300 V / 8 A / AWG 28 - AWG 14	Box
1638570000	BL 3.50/04/90 SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 90°, Clamping yoke connection, Clamping	4008190276119	100 pc(s).	IEC: 320 V / 12 A / 0.2 - 1.5 mm ² UL: 300 V / 8 A / AWG 28 - AWG 14	Box

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

range, rated connection,
max.: 1.5 mm², Box

BL 3.5/180


Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.20 - 1.5 mm² (IEC) / 28 - 14 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 17 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1615690000	BL 3.50/04/180 SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190059033	100 pc(s).	IEC: 320 V / 17 A / 0.2 - 1.5 mm ² UL: 300 V / 10 A / AWG 28 - AWG 14	Box
1597380000	BL 3.50/04/180 SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190111489	100 pc(s).	IEC: 320 V / 17 A / 0.2 - 1.5 mm ² UL: 300 V / 10 A / AWG 28 - AWG 14	Box

BLIDCB 3.5


Female connectors for fast wiring with IDC system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.35 - 0.5 mm² (IEC) / 22 - 20 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 6 A (IEC) / 7 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1751400000	BLIDCB 3.50/04/- SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 90°/270°, IDC terminal, Clamping range, rated connection, max.: 0.5 mm ² , Box	4032248174331	10 pc(s).	IEC: 250 V / 6 A / 0.35 - 0.5 mm ² UL: 300 V / 7 A / AWG 22 - AWG 20	Box
1770690000	BLIDCB 3.50/04/- SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 90°/270°, IDC	4032248174478	10 pc(s).	IEC: 250 V / 6 A / 0.35 - 0.5 mm ² UL: 300 V / 7 A / AWG 22 - AWG 20	Box

Creation date April 19, 2013 3:58:00 PM CEST

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

terminal, Clamping range,
rated connection, max.: 0.5
mm², Box

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
BL 3.5/90F


Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.20 - 1.5 mm² (IEC) / 28 - 14 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 17 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1639030000	BL 3.50/04/90F SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 90°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190276577	100 pc(s).	IEC: 320 V / 12 A / 0.2 - 1.5 mm ² UL: 300 V / 8 A / AWG 28 - AWG 14	Box
1639260000	BL 3.50/04/90F SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 90°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190276805	100 pc(s).	IEC: 320 V / 12 A / 0.2 - 1.5 mm ² UL: 300 V / 8 A / AWG 28 - AWG 14	Box

BL 3.5/180LH


Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.20 - 1.5 mm² (IEC) / 28 - 14 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 17 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1687670000	BL 3.50/04/180LH SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190853228	100 pc(s).	IEC: 320 V / 17 A / 0.2 - 1.5 mm ² UL: 300 V / 10 A / AWG 28 - AWG 14	Box
1687900000	BL 3.50/04/180LH SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 180°, Clamping yoke connection, Clamping	4008190853457	100 pc(s).	IEC: 320 V / 17 A / 0.2 - 1.5 mm ² UL: 300 V / 10 A / AWG 28 - AWG 14	Box

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

range, rated connection,
max.: 1.5 mm², Box


BL 3.5/270F


Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.20 - 1.5 mm² (IEC) / 28 - 14 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 17 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1640180000	BL 3.50/04/270F SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 270°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190277741	100 pc(s).	IEC: 320 V / 12 A / 0.2 - 1.5 mm ² UL: 300 V / 8 A / AWG 28 - AWG 14	Box
1639950000	BL 3.50/04/270F SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 270°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190277505	100 pc(s).	IEC: 320 V / 12 A / 0.2 - 1.5 mm ² UL: 300 V / 8 A / AWG 28 - AWG 14	Box

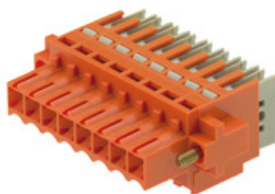BLIDCB 3.5F


Female connectors for fast wiring with IDC system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.35 - 0.5 mm² (IEC) / 22 - 20 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 6 A (IEC) / 7 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1770760000	BLIDCB 3.50/04/-F SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 90°/270°, IDC terminal, Clamping range, rated connection, max.: 0.5 mm ² , Box	4032248174546	10 pc(s).	IEC: 250 V / 6 A / 0.35 - 0.5 mm ² UL: 300 V / 7 A / AWG 22 - AWG 20	Box
1751470000	BLIDCB 3.50/04/-F SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 90°/270°, IDC	4032248174409	10 pc(s).	IEC: 250 V / 6 A / 0.35 - 0.5 mm ² UL: 300 V / 7 A / AWG 22 - AWG 20	Box

Creation date April 19, 2013 3:58:01 PM CEST

**OMNIMATE Signal - series BL/SL 3.50
SL 3.50/04/90G 3.2SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

terminal, Clamping range,
rated connection, max.: 0.5
mm², Box

BL 3.5/180F



Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They include space for labelling and can be coded.

- 0.20 - 1.5 mm² (IEC) / 28 - 14 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 17 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1615800000	BL 3.50/04/180F SN BK BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190062279	100 pc(s).	IEC: 320 V / 17 A / 0.2 - 1.5 mm ² UL: 300 V / 10 A / AWG 28 - AWG 14	Box
1606660000	BL 3.50/04/180F SN OR BX	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 4, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm ² , Box	4008190174620	100 pc(s).	IEC: 320 V / 17 A / 0.2 - 1.5 mm ² UL: 300 V / 10 A / AWG 28 - AWG 14	Box