


OMNIMATE Signal - series BL/SL 5.08 BLC 5.08/02/180BR OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

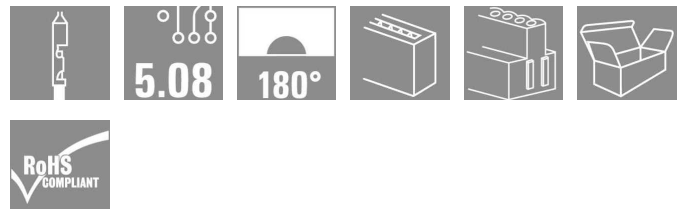

Female plugs with crimp wire connection system. The female plugs provide space for labelling and can be coded.

- 0.25 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21 A (IEC) / 10 A (UL)

General ordering data

Type	BLC 5.08/02/180BR OR BX
Order No.	1649370000
Version	PCB plug-in connector, female plug, 5.08 mm, No. of poles: 2, 180°, Crimp connection, Clamping range, rated connection, max.: 2.5 mm ² , Box
GTIN (EAN)	4008190294496
Qty.	100 pc(s).
Product data	IEC: 400 V / 21 A UL: 300 V / 10 A / AWG 26 - AWG 14
Packaging	Box

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	1.51 g
------------	--------

System parameters

Product family	OMNIMATE Signal - series BL/SL 5.08	Wire connection method	Crimp connection
Conductor outlet direction	180°	Pitch in mm (P)	5.08 mm
Pitch in inches (P)	0.2 inch	No. of poles	2
Stripping length	5 mm	L1 in mm	5.08 mm
L1 in inches	0.2 inch	Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch

Material data

Insulating material	PBT GF	Moisture Level (MSL)	3
Colour	Orange	Colour chart (similar)	RAL 2000
UL 94 flammability rating	V-0	CTI	≥ 200
Contact material	Cu-Leg	Operating temperature, min.	-50 °C
Operating temperature, max.	100 °C	Temperature range, installation, min.	-25 °C
Temperature range, installation, max.	100 °C		


Connectable conductors

Clamping range, rated connection, min.	0.22 mm ²	Clamping range, rated connection, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 24	Wire connection cross section AWG, max.	AWG 14
Flexible, min. H05(07) V-K	0.5 mm ²	Flexible, max. H05(07) V-K	2.5 mm ²

Rating data acc. to IEC 60664-1 / IEC 61984

Rated current, min. no. of poles (Tu=20°C)	21 A	Rated current, max. no. of poles (Tu=20°C)	14.5 A
Rated current, number of poles (Tu=40°C), min	18 A	Rated current, number of poles (Tu=40°C), max.	12.5 A
Rated voltage for surge voltage class / pollution degree II/2	400 V	Rated voltage for surge voltage class / pollution degree III/2	320 V
Rated voltage for surge voltage class / pollution degree III/3	250 V	Rated impulse voltage for surge voltage class/ pollution degree II/2	4 kV
Rated impulse voltage for surge voltage class/ pollution degree III/2	4 kV	Rated impulse voltage for surge voltage class/ contamination degree III/3	4 kV
Short-time withstand current resistance	3 x 1s with 120 A		

CSA rating data

Institute (CSA)		Certificate No. (CSA)	12400-374
Rated voltage (Use group B)	300 V	Rated current (use group B)	10 A
Rated voltage (use group D)	300 V	Rated current (use group D)	10 A
Wire cross-section, AWG, min.	AWG 26	Wire cross-section, AWG, max.	AWG 14


Data sheet

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

UL 1059 rating data

Institute (UR)		Certificate No. (UR)	
		E60693	
Rated voltage (use group B)	300 V	Rated current (use group B)	10 A
Rated voltage (use group D)	300 V	Rated current (use group D)	10 A
Wire cross-section, AWG, min.	AWG 26	Wire cross-section, AWG, max.	AWG 14

Classifications

ETIM 3.0	EC001284	ETIM 4.0	EC002637
ETIM 5.0	EC002637	ETIM 6.0	EC002637
UNSPSC	30-21-18-10	eClass 5.1	27-26-07-04
eClass 6.2	27-26-07-04	eClass 7.1	27-44-04-02

Notes

Notes	<ul style="list-style-type: none"> • Additional colours on request • Rated current related to rated cross-section & min. No. of poles. • Rated cross-section depends on crimp contact used. • P on drawing = pitch • Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
IPC conformity	The products are developed, manufactured and delivered according to the internationally recognised IPC-A-610 standard, category "permissible". More extensive demands on the products can be evaluated on request.

Approvals



Approvals	
ROHS	Conform

Data sheet

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

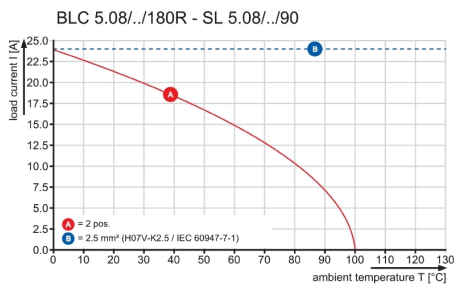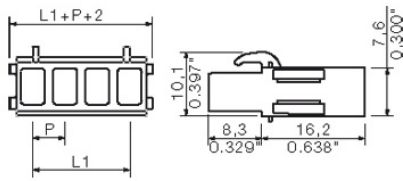

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.08/180LF Tape


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1776364001	PCB plug-in connector,	4032248163472	250 pc(s).	IEC: 400 V / 27.5 A	Tape
5.08HC/02/180LF		male header, Solder flange,			UL: 300 V / 18.5 A	(Ø
1.5 SN BK RL		Reflow solder connection,				330
		5.08 mm, No. of poles: 2,				mm)
		180°, Solder pin length (l):				
		1.5 mm, tinned, Black, Tape				
		(Ø 330 mm)				

SL-SMT 5.08/180 Tape


High-temperature-resistant, straight, open pin header. Packed in box or tape. On tape and with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1821100000	PCB plug-in connector, male	4032248319749	250 pc(s).	IEC: 400 V / 27.5 A	Tape
5.08HC/02/180		header, open side, Reflow			UL: 300 V / 18.5 A	(Ø
1.5 SN BK RL		solder connection, 5.08				330
		mm, No. of poles: 2, 180°,				mm)
		Solder pin length (l): 1.5				
		mm, tinned, Black, Tape (Ø				
		330 mm)				

OMNIMATE Signal - series BL/SL 5.08 BLC 5.08/02/180BR OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

SLZF 5.08/180F



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Delivery status	Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SLZF 5.08/02/180F SN OR BX	1846930000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248363100	100 pc(s).

SLD 5.08/180G



2-tier male header with parallel pin arrangement. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 11 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD 5.08/04/180G 3.2SN OR BX	1602390000	PCB plug-in connector, male header, closed side, Solder connection, 5.08 mm, No. of poles: 4, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190180539	50 pc(s).	IEC: 400 V / 11 A UL: 300 V / 10 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.00HC/90LF Tape


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.00HC/02/90LF 1.5SN BK RL	1797750000	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.00 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape (Ø 330 mm)	4032248239757	350 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Tape (Ø 330 mm)

SLDF 5.08


Male connector for through-panel mounting with optional locking function. Internal connection as flat-blade or solder connection. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLDF 5.08 L/F 2 SN BK BX	1635740000	PCB plug-in connector, male header, 5.08 mm, No. of poles: 2, 180°, Flat- blade connection, Solder connection, Box	4008190264161	100 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box
SLDF 5.08 L/F 2 SN OR BX	1599130000	PCB plug-in connector, male header, 5.08 mm, No. of poles: 2, 180°, Flat- blade connection, Solder connection, Box	4008190175931	100 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SLS 5.08/180F


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLS 5.08/02/180F SN OR BX	1846360000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248362066	90 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² UL: 300 V / 14 A / AWG 26 - AWG 12	Box

SL-SMT 5.08HC/90LF Tape


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.08HC/02/90LF 1.5 SN BK RL	1775234001	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape (Ø 330 mm)	4032248167784	350 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Tape (Ø 330 mm)

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SLS 5.08/180FI


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLS 5.08/02/180FI SN OR BX	1846210000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248362493	90 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² UL: 300 V / 14 A / AWG 26 - AWG 12	Box

SL-SMT 5.00HC/180G Tape


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.00HC/02/180G 1.5 SN BK RL	1797870000	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.00 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Tape (Ø 330 mm)	4032248239870	250 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Tape (Ø 330 mm)

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL 5.00/90


Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL 5.00/02/90 4.5SN BK BX	1625990000	PCB plug-in connector, male header, open side, Solder connection, 5.00 mm, No. of poles: 2, 90°, Solder pin length (l): 4.5 mm, tinned, Black, Box	4008190197292	100 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box
SL 5.00/02/90 3.2SN OR BX	1571130000	PCB plug-in connector, male header, open side, Solder connection, 5.00 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190156121	100 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box

SL-SMT 5.08/180LF Box


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.08HC/02/180LF 1.5SN BK BX	1776362001	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248159147	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box
SL-SMT 5.08HC/02/180LF 3.2SN BK BX	1838440000	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 2,	4032248348503	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

180°, Solder pin length (l):
3.2 mm, tinned, Black, Box

SL 5.08/135


Male connectors with 135° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 17 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1603060000	PCB plug-in connector, male	4008190095512	100 pc(s).	IEC: 400 V / 17 A	Box
5.08/02/135		header, open side, Solder connection, 5.08 mm, No. of poles: 2, 135°, Solder pin length (l): 3.2 mm, tinned, Orange, Box			UL: 300 V / 15 A	
3.2SN OR BX						

SL-SMT 5.08HC/90 Tape


High-temperature-resistant, 90° angled, open male header. Packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1821160000	PCB plug-in connector, male	4032248319800	350 pc(s).	IEC: 400 V / 27.5 A	Tape
5.08HC/02/90		header, open side, Reflow solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape (Ø 330 mm)			UL: 300 V / 18.5 A	(Ø 330 mm)
1.5 SN BK RL						

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.08HC/90F Box


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1837630000	PCB plug-in connector, male	4032248347445	100 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/02/90F		header, Flange, Reflow			UL: 300 V / 18.5 A	
3.2SN BK BX		solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

SL-SMT 5.08HC/90G Box


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1775002001	PCB plug-in connector, male	4032248156023	100 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/02/90G		header, closed side, Reflow			UL: 300 V / 18.5 A	
1.5SN BK BX		solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box				
SL-SMT	1780180000	PCB plug-in connector, male	4032248165506	100 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/02/90G		header, closed side, Reflow			UL: 300 V / 18.5 A	
3.2SN BK BX		solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

OMNIMATE Signal - series BL/SL 5.08 BLC 5.08/02/180BR OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

SL-SMT 5.08/180G Tape



High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1820170000	PCB plug-in connector, male	4032248315680	250 pc(s).	IEC: 400 V / 27.5 A	Tape
5.08HC/02/180G		header, closed side, Reflow			UL: 300 V / 18.5 A	(Ø
1.5 SN BK RL		solder connection, 5.08				330
		mm, No. of poles: 2, 180°,				mm)
		Solder pin length (l): 1.5				
		mm, tinned, Black, Tape (Ø				
		330 mm)				

SL 5.08/90B



Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Delivery status	Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SL 5.08/02/90B 3.2SN OR BX	1510360000	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 2, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190180188	100 pc(s).
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SL 5.08/02/90B 3.2SN BK BX	1510310000	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 2, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190477684	100 pc(s).

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

mm, No. of poles:
2, Solder pin
length (l): 3.2 mm,
tinned, Black, Box

SL-SMT 5.00HC/90LF Box


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.00HC/02/90LF 3.2SN BK BX	1840350000	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.00 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248351091	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box
SL-SMT 5.00HC/02/90LF 1.5SN BK BX	1797230000	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.00 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248238019	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box

SLS 5.08/180 SN


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLS 5.08/02/180 SN OR BX	1627090000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Clamping yoke connection, Clamping	4008190199609	180 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² UL: 300 V / 14 A / AWG 26 - AWG 12	Box

OMNIMATE Signal - series BL/SL 5.08 BLC 5.08/02/180BR OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

range, rated connection,
 max.: 3.31 mm², Box

SL 5.08/90



Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SL 5.08/02/90 3.2SN OR BX	1508060000	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190189006	100 pc(s)

SL-SMaRT 5.0xHC/90 Tape



High-temperature resistant, modular pin header. Packed in tape with 1.5mm solder pin, optimised for automatic assembly and suitable for reflow soldering. The male connectors provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMART 5.0XHC/02/90 1.5SN BK RL	1812430000	PCB plug-in connector, male header, open side, Reflow solder connection, 5.00 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape (Ø 330 mm)	4032248294015	350 pc(s)	IEC: 400 V / 27.5 A UL: 300 V / 15 A	Tape (Ø 330 mm)

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SLZF 5.08/180FI


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SLZF 5.08/02/180FI SN OR BX	1846510000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248362813	100 pc(s).

SL-SMT 5.08/180G Box


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.08HC/02/180G 3.2SN BK BX	1838210000	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 2, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248348275	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box
SL-SMT 5.08HC/02/180G 1.5SN BK BX	1775922001	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248158911	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.08HC/90G Tape


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1821140000	PCB plug-in connector, male	4032248319787	350 pc(s).	IEC: 400 V / 27.5 A	Tape
5.08HC/02/90G		header, closed side, Reflow			UL: 300 V / 18.5 A	(Ø
1.5 SN BK RL		solder connection, 5.08				330
		mm, No. of poles: 2, 90°,				mm)
		Solder pin length (l): 1.5				
		mm, tinned, Black, Tape (Ø				
		330 mm)				

SL-SMaRT 5.0xHC/180 Tape


High-temperature resistant, modular pin header. Packed in tape with 1.5mm solder pin, optimised for automatic assembly and suitable for reflow soldering. The male connectors provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMaRT	1812450000	PCB plug-in connector, male	4032248294039	270 pc(s).	IEC: 400 V / 27.5 A	Tape
5.0xHC/02/180		header, open side, Reflow			UL: 300 V / 15 A	(Ø
1.5SN BK RL		solder connection, 5.00				330
		mm, No. of poles: 2, 180°,				mm)
		Solder pin length (l): 1.5				
		mm, tinned, Black, Tape (Ø				
		330 mm)				

OMNIMATE Signal - series BL/SL 5.08 BLC 5.08/02/180BR OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

SLZF 5.08/180



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Delivery status	Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SLZF 5.08/02/180 SN BK BX	1709600000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190318901	100 pc(s).
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SLZF 5.08/02/180 SN OR BX	1709370000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190390150	100 pc(s).

SL-SMT 5.08/180 Box



High-temperature-resistant, straight, open pin header. Packed in box or tape. On tape and with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.08HC/02/180 3.2SN BK BX	1837980000	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 2, 180°	4032248348046	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

		Solder pin length (l): 3.2 mm, tinned, Black, Box		
SL-SMT	1775522001	PCB plug-in connector, male	4032248157549 100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A
5.08HC/02/180		header, open side, Reflow		
1.5SN BK BX		solder connection, 5.08 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box		Box

SL-SMT 5.08HC/90 Box


High-temperature-resistant, 90° angled, open male header. Packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1774762001	PCB plug-in connector, male	4032248155699 100 pc(s).		IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box
5.08HC/02/90		header, open side, Reflow				
1.5SN BK BX		solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box				
SL-SMT	1779950000	PCB plug-in connector, male	4032248165278 100 pc(s).		IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box
5.08HC/02/90		header, open side, Reflow				
3.2SN BK BX		solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

SL-SMT 5.08HC/90LF Box


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1775232001	PCB plug-in connector,	4032248157211 100 pc(s).		IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box
5.08HC/02/90LF		male header, Solder flange,				
1.5SN BK BX		Reflow solder connection,				

Creation date February 16, 2015 6:49:50 PM CET

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

5.08 mm, No. of poles: 2,
90°, Solder pin length (l):
1.5 mm, tinned, Black, Box

SL-SMT	1780410000	PCB plug-in connector,	4032248165735 100 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/02/90LF		male header, Solder flange,		UL: 300 V / 18.5 A	
3.2SN BK BX		Reflow solder connection, 5.08 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box			

SL-SMT 5.08/180F Box


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1837320000	PCB plug-in connector, male	4032248345915	100 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/02/180F		header, Flange, Reflow			UL: 300 V / 18.5 A	
1.5SN BK BX		solder connection, 5.08 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box				
SL-SMT	1837860000	PCB plug-in connector, male	4032248347674	100 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/02/180F		header, Flange, Reflow			UL: 300 V / 18.5 A	
3.2SN BK BX		solder connection, 5.08 mm, No. of poles: 2, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmuller.com

Mating connector (conditionally pluggable)
SLDV-THR 5.08/180FLF


High-temperature resistant, double level, laterally offset, male connector with flange or solder flange. 1.5 mm solder pin is suitable for reflow soldering. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-05-20	SLDV-THR 5.08/04/180FLF 1.5SN BK BX	1829130000	PCB plug-in connector, male header, Flange / Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 4, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248335824	50 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A
	SLDV-THR 5.08/04/180FLF 3.2SN BK BX	1829010000	PCB plug-in connector, male header, Flange / Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 4, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248335701	50 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A

SL-SMT 5.00HC/180G Box


High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.00HC/02/180G 3.2SN BK BX	1841160000	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.00 mm, No. of poles: 2, 180°	4032248352050	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box

Data sheet

OMNIMATE Signal - series BL/SL 5.08 BLC 5.08/02/180BR OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

		Solder pin length (l): 3.2 mm, tinned, Black, Box				
2014-05-20	T08SLDV-THR 5.08/180G 1.5SN BK BX	1796630000	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.00 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248237258	100 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A

SLD 5.08/90G



2-tier male header with parallel pin arrangement. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 11 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD 5.08/04/90G 3.2SN OR BX	1601790000	PCB plug-in connector, male header, closed side, Solder connection, 5.08 mm, No. of poles: 4, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190055752	50 pc(s).	IEC: 400 V / 11 A UL: 300 V / 10 A	Box

SLDV-THR 5.08/180F



High-temperature resistant, double level, laterally offset, male connector with flange or solder flange. 1.5 mm solder pin is suitable for reflow soldering. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-05-20	T08SLDV-THR 5.08/180F 1.5SN BK BX	1828890000	PCB plug-in connector, male header, Flange, Reflow solder	4032248335589	50 pc(s).	IEC: 400 V /

Creation date February 16, 2015 6:49:50 PM CET

Data sheet


**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

	connection, 5.08	15		
	mm, No. of poles:	A		
	4, 180°, Solder	UL:		
	pin length (l): 1.5	300		
	mm, tinned, Black,	V /		
	Box	10		
		A		
SLDV-THR 1828770000	PCB plug-in connector, male	4032248335442 50 pc(s).	IEC: 400 V / 15 A	Box
5.08/04/180F	header, Flange, Reflow		UL: 300 V / 10 A	
3.2SN BK BX	solder connection, 5.08			
	mm, No. of poles: 4, 180°,			
	Solder pin length (l): 3.2			
	mm, tinned, Black, Box			

SL 5.08/180



Male connectors with straight outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Delivery status	Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SL 5.08/02/180 3.2SN OR BX	1517260000	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 2, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190034795	100 pc(s).

OMNIMATE Signal - series BL/SL 5.08 BLC 5.08/02/180BR OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (fully pluggable)

SL 5.00/90B



Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1580860000	PCB plug-in connector, male	4008190054489	100 pc(s).	IEC: 400 V / 18 A	Box
5.00/02/90B		header, Dovetails for fixing			UL: 300 V / 15 A	
3.2SN OR BX		blocks, Solder connection, 5.00 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

SLZF 5.08/180B



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Delivery status	Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SLZF 5.08/02/180B SN OR BX	1710210000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190319526	100 pc(s).

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)
SL 5.08/135B


Male connectors with 135° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 17 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL 5.08/02/135B 3.2SN OR BX	1605530000	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 2, 135°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190104290	100 pc(s).	IEC: 400 V / 17 A UL: 300 V / 15 A	Box

SLT 5.08B


Male plugs with screw TOP wire connection. The male plug provides space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 16 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLT 5.08/02/180B SN OR BX	1611710000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, TOP connection, Clamping range, rated connection, max.: 2.5 mm ² , Box	4008190192594	100 pc(s).	IEC: 400 V / 16 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 14	Box


Data sheet

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SL 5.08/180B



Male connectors with straight outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Delivery status	Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SL 5.08/02/180B OR BX	3.2SN 1519560000	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 2, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190083892	100 pc(s).

SLZF 5.08/270B



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data


Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-06-23T00:00:00+01:00	SLZF 5.08/270B SN OR BX	1706140000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 270°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248113996	100 pc(s).	IEC: 400 V / 20.5 A / 0.2 - 2.5 mm ² UL: 300 V /

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

15
A /
AWG
26
-
AWG
12

SLS 5.08/180B


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLS 5.08/02/180B SN OR BX	1627240000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190199753	100 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² UL: 300 V / 14 A / AWG 26 - AWG 12	Box

SLZF 5.08/90B


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Delivery status	Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	2017-12-31T00:00:00+01:00	SLZF 5.08/02/90B SN OR BX	1673550000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 2, 90°, Tension clamp connection, Clamping range, rated connection,	4008190435264	100 pc(s).

Data sheet

**OMNIMATE Signal - series BL/SL 5.08
BLC 5.08/02/180BR OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

max.: 3.31 mm²,
Box

Adressen weltweit

Let's connect.

- AE Vereinigte Arabische Emirate**
Weidmüller Middle East FZE
Warehouse Q3-79
SAIF-Zone
P.O. BOX 8591
Sharjah
Telefonnummer +971 65572723
Faxnummer +971 65572724
wme.info@weidmueller.com
- AO Angola**
Bitte kontaktieren Sie
Phambili Interface
Südafrika
- AR Argentinien**
CPI SA
Bauness 2660
C1431DOF Buenos Aires
Telefonnummer +54 11 4523 8008
Faxnummer +54 11 4522 0546
info@cpi.com.ar
www.cpi.com.ar
- AT Österreich**
Weidmüller GmbH
IZ NOE Süd Straße 2b, Obj
M 59
2355 Wiener Neudorf
Telefonnummer +43 2236 67080
Faxnummer +43 2236 6708-899
office.at@weidmueller.com
www.weidmueller.com
- AU Australia**
Weidmüller Pty. Ltd.
PO BOX 6944
Huntingwood 2148
Huntingwood Drive 43
Huntingwood NSW 2148
Telefonnummer +61 2 9671 9999
Faxnummer +61 2 9671 9911
info@weidmueller.com.au
www.weidmueller.com.au
- AZ Aserbaidschan**
Repräsentanz Büro
Rashad Mahmudov
Demirchi Tower, 4th floor
37, Khojali ave.
AZ 1025 Baku
Telefonnummer +994 12 488 80 36
Faxnummer +994 12 488 80 37
rashad.mahmudov@weidmueller.com
- BA Bosnien und Herzegowina**
Bitte kontaktieren Sie
unser Representative Office
Weidmüller Interface GmbH
& Co. KG
Serbien

oder

BIG electric d.o.o
Mladena Stojanovića 117A
78000 Banja Luka
Telefonnummer +387 51926277
Faxnummer +387 51926277
bigelectric@blic.net
www.bigelectric.ba
- BE Belgien**
Weidmüller Benelux B. V.
Mechelsesteenweg 519 bus
6 an 7
1930 Nossegem
Telefonnummer +32 2 752 40 70
Faxnummer +32 2 751 36 06
info@weidmueller.be
www.weidmueller.be
- BG Bulgarien**
Weid-Bul EOOD
Bul. "Kliment Ohridski" 13
1756 Sofia
Telefonnummer +359 2 963 2560
Faxnummer +359 2 963 1098
sofia@weidbul.com
www.weidbul.com
- BH Bahrain**
Khayber Trading Company
P.O Box 1976
Manama
Telefonnummer +973 720747
Faxnummer +973 720331
khayber@batelco.com.bh
- BR Brasilien**
Weidmüller Conexel do Brasil
Conexões Elétricas Ltda.
Av. Presidente Juscelino, 642
- Piraporinha
Diadema, São Paulo
09950-370
Telefonnummer +55 (11) 4366-9600
Faxnummer +55 (11) 4362-1677
vendas@weidmueller.com.br
www.weidmueller.com.br
- BW Botswana**
Bitte kontaktieren Sie
Phambili Interface
Südafrika
- BY Weißrussland**
TECHNIKON Ltd.
Nezavisimosti pr. 177-9
220125 Minsk
Telefonnummer +375 17 393-11-77
Faxnummer +375 17 3930080
wm@technikon.by
- CA Kanada**
W Interconnections Canada
Inc.
10 Spy Court
Markham Ontario L3R 5H6
Telefonnummer +1 (905) 475-1507 Ext. 9836
Faxnummer +1 (905) 475-2798
support@weidmuller.ca
www.weidmuller.ca
- CG Kongo**
Bitte kontaktieren Sie
Phambili Interface
Südafrika
- CH Schweiz**
Weidmüller Schweiz AG
Rundbuckstraße 2
82 12 Neuhausen am
Rheinfall SH
Telefonnummer +41 52 674 07 07
Faxnummer +41 52 674 07 08
info@weidmueller.ch
www.weidmueller.ch
- CL Chile**
ATS- INTECH
Maria Luisa Santander 0475
Santiago
Providencia 7500859
Telefonnummer +56 2 341 1271
Faxnummer +56 2 341 1275
felipe@atsintech.com
www.atsintech.com

CPI CHILE LTDA
Av. Presidente Frei Montalva
6001, 47 complejo el cortijo
Santiago - Conchalí
Telefonnummer +562 963 8440
Faxnummer +562 963 8440
cpi@cpichile.cl
www.cpichile.cl
- CN China**
Weidmüller Interface
(Shanghai) Co. Ltd.
100 Yutong Road
25 F. BM Intercontinental
Business Center
200070 Shanghai
Telefonnummer +86 21-22195008
Faxnummer +86 512-68417505
customer.hotline@weidmueller.com.cn
www.cnweidmuller.com
- CO Kolumbien**
Automatización Avanzada
S. A.
Carrera 97 No., 24 c - 23
Bodega 4
110911 Bogotá-D.C.
Telefonnummer +57 (1) 547-8510
Faxnummer +57 (1) 422-3044
comercial@
automatizacionavanzada.com
www.
automatizacionavanzada.com
- CR Costa Rica**
ELVATRON S. A.
la Uruca 400 Norte Banco
Costa Rica
San Jose Costa Rica
Telefonnummer +506 2961-060
Faxnummer +506 5200-609
dirk.haese@elvatron.com
www.elvatron.com
- CZ Tschechische Republik**
Weidmüller s.r.o.
Lomnického 5/1705
140 00 Praha 4
Telefonnummer +420 244 001 400
Faxnummer +420 244 001 499
office@weidmueller.cz
www.weidmueller.cz
- DE Deutschland**
Weidmüller GmbH & Co. KG
Ohmstraße 9
32758 Detmold
Postfach 30 54
32720 Detmold
Telefonnummer +49 5231 1428-0
Faxnummer +49 5231 14-292083
weidmuller@weidmueller.de
www.weidmueller.de
- DK Dänemark**
Weidmüller Danmark
Vallensbækvej 18A
2605 Brøndby
Telefonnummer +45 27747800
kundeservice@weidmuller.dk
www.weidmuller.dk
- EC Ecuador**
Elsystec S. A., Electricidad
Sistemas y Tecnología
Vasco de Contreras N35-251
y Mañosa
Quito - Pichincha
Telefonnummer +593 22456510
Faxnummer +593 22456755
Elsystec@uiio.satnet.net
- EE Estland**
Bitte kontaktieren Sie
unser Representative Office
Weidmüller Interface GmbH
& Co. KG
Lettland

oder


Soots Interface OÜ
Pärnu mnt 142
11317 Tallinn
Telefonnummer +372 609 6933
Faxnummer
info@sootsinterface.ee
www.sootsinterface.ee
- EG Ägypten**
Standard Electric (OMEGA)
87, Mohamed Farid Street
Heliopolis
Cairo
Telefonnummer +202 26229000
Faxnummer +202 26221555
stdelec@rite.com
- ES Spanien**
Weidmüller, S. A.
Narcis Monturiol 11-13, Pol.
Ind. Sudoeste
8960 Sant Just
Desvern - Barcelona
Telefonnummer +34 934 803 386
Faxnummer +34 933 718 055
weidmuller@weidmuller.es
www.weidmuller.es
- FI Finnland**
Weidmüller Suomi,
Weidmüller Aktiebolagetin
sivuliike
Koy Plaza Vivace
Äyritie 8C
FI 15100 Vantaa
Telefonnummer +358 20 7351300
Faxnummer +358 800 114 667
asiakaspalvelu@weidmuller.fi
www.weidmuller.fi
- FR Frankreich**
Weidmüller E. U. R. L.
12, Chaussée Jules César
BP 263 Osny
95523 Cergy-Pontoise Cedex
Telefonnummer +33 1 34 24 55 00
Faxnummer +33 1 34 24 55 01
mail@weidmuller.fr
- GB Großbritannien**
Weidmüller Ltd.
Klippon House
Centurion Court Office Park,
Meridian East, Meridian
Business Park
Leicester
LE19 1TP
Telefonnummer +44 116 282 3470
Faxnummer +44 116 289 3582
marketing@weidmuller.co.uk
www.weidmuller.co.uk
- GE Georgien**
Bitte kontaktieren Sie
unser Representative Office
Rashad Mahmudov
Aserbaidschan.
- GR Griechenland**
G.A. Solutions
Ippokratous 11 Metamorfois
144 52 Athen
Telefonnummer +30 210 2823233
Faxnummer +30 210 2823233
info@weidmuller.gr
www.weidmuller.gr
- GT Guatemala**
Prestelectro, Prestegard
Electro, S.A.
Avenida Petapa 44-22,
Zona 12
Guatemala City
Telefonnummer +502 2442-3346
Faxnummer +502 2476-8945
ventas@prestelectro.com
- HK Hong Kong**
Weidmüller (Hong Kong)
Limited Co. Ltd.
Unit 1617, Metropolis Tower
No. 10 Metropolis Drive,
Hunghom, Kowloon
Telefonnummer +852 3154 8088
Faxnummer +852 31548099
Info-hk@weidmueller.com.hk
- HR Kroatien**
ElektroPARTNER d.o.o.
Slavonska avenija 24/6
HR-10000 Zagreb
Telefonnummer +385 (1) 6184 793
Faxnummer +385 (1) 6184 795
elektropartner@zg.t-com.hr
www.elektropartner.hr
- HU Ungarn**
Weidmüller Kereskedelmi Kft.
Budapest
Gubacsi út 6.
1097
Telefonnummer +36 1 382 7700
Faxnummer +36 1 382 7701
info@weidmueller.hu
www.weidmueller.hu
- ID Indonesien**
PT. Nego Electrindo
Ruko Mega Grosir Cempaka
Mas Blok 1 No. 20 - 22
Jakarta 10640
Telefonnummer +62 21 42882255
Faxnummer +62 21 42882266
sales@negoelectrindo.co.id
- IE Irland**
Bitte kontaktieren Sie
Weidmüller Ltd.
Großbritannien
- IL Israel**
A. U. Shay Ltd.
23/25, Embar Street
49222 Petach-Tikva
P.O. Box 1 00 49
49222 Petach-Tikva
Telefonnummer +972 3-923-3601
Faxnummer +972 3-923-4601
shay@uriel-shay.com
www.uriel-shay.com
- ATEKA Ltd.**
4, Ha Tavor lane Industrial
area Segula
49691 Petach-Tikva
P.O. Box 4710
Petach-Tikva
Telefonnummer +972 73-200-1311
Faxnummer +972 3-924 4245
marketing@ateka.co.il
www.ateka.co.il
- IN Indien**
Repräsentanz Büro
Weidmüller Electronics India
Pvt. Ltd.
12th Lane North Avenue, Opp
Joggers Park,
Kalyani Nagar, Pune
411 006
Telefonnummer +91 20-41290090
wmi.pune@weidmueller.in
www.weidmueller.com
- IS Island**
Samey Automation Center
Lyngas 13
210 Garoabaer
Telefonnummer +354 510 5200
Faxnummer +354 5 10 5201
Samey@samey.is
www.samey.is
- IT Italien**
Weidmüller S. r.l.
Via Albert Einstein 4
20092 Cinisello
Balsamo Milano
Telefonnummer +39 02 660681
Faxnummer +39 02 6124945
weidmuller@weidmuller.it
www.weidmuller.it
- JM Jamaika**
Bitte kontaktieren Sie
W Interconnections Inc.
USA
- JO Jordanien**
Trans Jordan for Electro
PO Box 33 06 07
Amman
Telefonnummer +962 6 533 2020
Faxnummer +962 6 533 5800
transjordan@batelco.jo
- JP Japan**
Nihon Weidmüller Co. Ltd.
Sphere Tower Tennoz 2-2-8
Higashi-Shinagawa,
Shinagawa-ku
Tokyo
140-0002
Telefonnummer +81 3 6711 5300
Faxnummer +81 3 6711 5333
weidmullerjapan@weidmuller.com.jp
www.weidmuller.co.jp



Alle Weidmüller Adressen sowie Ihren lokalen Ansprechpartner finden Sie im Internet unter: www.weidmuller.com/countries

Vertriebsgesellschaft 

Auslandsvertretung 

ohne Auslandsvertretung 

Let's connect.

- KE Kenia**
Bitte kontaktieren Sie Phambili Interface Südafrika
- KR Korea**
Weidmüller Korea Co. Ltd.
9th floor, Wonbang B/D
Samseong 2-Dong, Gangnam-Gu
Seoul 143-42
Telefonnummer +82 2-516-0003
Faxnummer +82 2-516-0090
info@weidmuller.co.kr
www.weidmuller.co.kr
- KW Kuwait**
Kana Controls General Trading & Contracting Co. W. L. L.
Al Rai Industrial Area, Plot 28-30, St. 31
13016 Safat
B.P. 25593
Telefonnummer +965 4741373
Faxnummer +965 4741537
info@kanacontrols.com
- KZ Kasachstan**
Bitte kontaktieren Sie OOO Weidmüller Russland
- LB Libanon**
Progress Engineering & Trading Enterprises
Al Nahr Street
Beirut 11-1111
Telefonnummer +961 1 444 664
Faxnummer +961 1 561 880
progress@inco.com.lb
- LT Litauen**
Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Lettland
oder
ELEKTROS IRANGA
Tinklu g. 29 a
LT-5319 Panevezys
Telefonnummer +370 (45) 582 828
Faxnummer
info@eliranga.lt
- LU Luxemburg**
Bitte kontaktieren Sie Weidmüller Benelux B. V. Niederlande
- LV Lettland**
SIA Abi4
Daugavgrivas 31b
Riga, LV-1007
Telefonnummer +371 674 70999
Faxnummer +371 676 24562
abi_4@tvnet.lv
Repräsentanz Büro
Weidmüller Interface GmbH & Co. KG
Udens str. 12-118
Riga, LV-1007
Telefonnummer +371 29254766
Faxnummer +371 674 65637
lgonis.rudaks@weidmueller.com
www.weidmueller.com
- MD Moldawien**
BERHORD A & D srl
79/1, str. Milescu Spartaru
MD-2075 Chisinau
Moldova
Telefonnummer +373 (22) 815002
Faxnummer +373 (22) 815007
atiuleanu@berhord.com
www.ad.berhord.com
- ME Montenegro**
Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien.
- MG Madagaskar**
Bitte kontaktieren Sie Phambili Interface Südafrika
- MK Mazedonien**
Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien
oder
ELEKTRO - SMK doool
UL. III Makedonska brigada
b.b.
1000 Skopje
Telefonnummer +389 22460295
Faxnummer
Elektro-smk@telekabel.net.mk
- MT Malta**
E. S. S., Electrical Supplies & Services Ltd.
San Gwakklin Road
Mriehel
Telefonnummer +356 21255777
Faxnummer +356 21255999
robert.agius@ess.com.mt
- MU Mauritius**
Mubelo Electrical Ltd.
Office 26, Gateway building,
St Jean Road
Quatre Bornes
Mauritius
Telefonnummer +230 4670989
Faxnummer +230 4654051
richard.mubelo@orange.mu
- MW Malawi**
Bitte kontaktieren Sie Phambili Interface Südafrika
- MX Mexiko**
W Interconnections S. A.
DE C. V.
Blvd. Hermanos Serdán 698,
Col. San Rafael Oriente
72029 Puebla
Telefonnummer +52 (222) 268 6227
Faxnummer +52 (222) 286 6242
clientes@weidmuller.com.mx
- MY Malaysia**
Connect Plus Technology
Sdn Bhd
No. 43, Jalan PJS 11/22,
Bandar Sunway
46150 Petaling Jaya
Selangor Darul Ehsan
Telefonnummer +60 3 5633 7363
Faxnummer +60 3 5633 6562
paul@cptech.com.my
www.cptech.com.my
- MZ Mosambik**
Bitte kontaktieren Sie Phambili Interface Südafrika
- NA Namibia**
Bitte kontaktieren Sie Phambili Interface Südafrika
- NG Nigeria**
Bitte kontaktieren Sie
- NL Niederlande**
Weidmüller Benelux B. V.
Franciscusweg 221
1216 SE Hilversum
Postfach 1505
1200 BM Hilversum
Telefonnummer +31 35 626 12 61
Faxnummer +31 35 623 20 44
info@weidmuller.nl
www.weidmuller.nl
- NO Norwegen**
Sivilingeniør J.F. Knudtzen AS
Billingstadsletta 97
1396 Billingstad
PO Box 160
1378 Nesbru
Telefonnummer +47 66 98 33 50
Faxnummer +47 66 98 09 55
firmapost@jfknuudtzen.no
www.jfknuudtzen.no
- NZ Neuseeland**
Cuthbert S. Steward Ltd.
27 Te Puni Street
Petone
PO Box 38496
Wellington Mail Centre 5054
Telefonnummer (04) 568 6156
Faxnummer (09) 489 1752
csl@cuthbertsteward.co.nz
Cuthbert S. Steward Ltd
4 Fred Thomas Drive
Aon Building, Ground Floor,
South Entry
Takapuna
PO Box 100 338
North Shore City 745
Telefonnummer (09) 489 1751
Faxnummer (04) 568 6056
cslak@cuthbertsteward.co.nz
- OM Oman**
DAN INTERNATIONAL LLC.
Ghala St. 111
BP 2901
Seeb
Telefonnummer +968 5036 77
Faxnummer +968 5037 55
yedu@danintl.com
- PE Peru**
IMPEXINCA S.A.C.
Calle Ortiz de Zevallos No.
105, Urb. San Antonio
18
Lima, Miraflores
Telefonnummer +51 1 447 5608
info@impexinca.pe
www.impexinca.pe
J & W CIA. S. A.
Calle 6 Mz. D Lte. 23, Urb.
Ind. Grimanesa
01
Callao
Telefonnummer +51 1 572 2539
Faxnummer +51 1 572 0152
contacto@jwcia.com
www.jwcia.com
- PH Philippinen**
Enclosure Systems Specialists
Inc.
2276 Don Chino Roces
Avenue Extension
Room 103/105 Narra Building
1231 Makati City
Telefonnummer +63 2 813 8580
Faxnummer +63 2 813 8596
sales_encsys@pltdsl.net
www.enclosuresystemsph.com
- PK Pakistan**
Automation Controls (Pak)
Apartment No. 33 C III,
Chenab Block, Allama Iqbal
Town
Lahore
Telefonnummer +92 42 37809948
Faxnummer +92 42 37809950
nadeem@acpак.com.pk
www.acpак.com.pk
- PL Polen**
Weidmüller Sp. z o. o.
ul. Ogrodowa 58
00-876 Warszawa
Telefonnummer +48 22 510 09 40
Faxnummer +48 22 510 09 41
biuro@weidmuller.com.pl
www.weidmuller.pl
- PR Puerto Rico**
Bitte kontaktieren Sie W Interconnections Inc. USA
- PT Portugal**
Weidmüller Sistemas de Interface S. A.
Estrada Outeiro Polima, R.
Augusto Dias da Silva, Lote B - Esc. 2
São Domingos de Rana
2785-515 Abóboda
Telefonnummer +351 214 459 191
Faxnummer +351 214 455 871
weidmuller@weidmuller.pt
www.weidmuller.pt
- PY Paraguay**
Bitte kontaktieren Sie CPI SA Argentinien
- QA Katar**
Petroleum Technology Co. W.L.L.
PO Box 16069
5th Floor Toyota tower
Telefonnummer +974 444 19603
Faxnummer +974 444 19604
petrotec@qatar.net.qa
www.petrotec.com.qa
- RO Rumänien**
Repräsentanz Büro
Weidmüller Interface GmbH & Co. KG
Ionescu Crum Street, No. 1, 1st Tower, 1st Floor, Office 4
500446 Brasov - Brasov Business Park
Telefonnummer +40 (268) 446 222
Faxnummer +40 (262) 205 410
claudiu.totea@weidmueller.com
www.weidmueller.com
- RS Serbien**
Repräsentanz Büro
Weidmüller Interface GmbH & Co. KG
Ustanička 189, III sprat lokal 7a
11050 Beograd
Telefonnummer +381 112885274
Faxnummer +381 112885274
zoran.rabrenovic@weidmueller.com
TeLa Elektrik d.o.o.
Ul. Dr. Drage Ljočić 6
Beograd
Telefonnummer +381 11 2772 850
office@tela.rs
www.tela.rs
- RU Russland**
OOO Weidmüller
Warschavskoye highway, 25
A, bld. 6
Moskau
117105
Telefonnummer +7 (495) 771-69-40
Faxnummer +7 (495) 771-69-41
Info@weidmueller.ru
www.weidmueller.ru
- SA Saudi-Arabien**
Al Abdulkarim Holding Co.
P.O. Box 4
Dammam 31411
Telefonnummer +966 3 8337110
Faxnummer +966 3 8829547
E-Mail salehsk@akh.com.sa
www.weidmueller.ae
Saudi Electric Supply Company (SESCO)
P.O. Box 32 98
Al Khobar 31952
Telefonnummer +966 3 8829546 Ext. 3030
Faxnummer
E-Mail Safdar.Malik@sescogex.com
www.sesco-gex.com
- SE Schweden**
Weidmüller AB
Axel Danielssons väg 271
BOX 3 1025
SE-200 49 Malmö
Telefonnummer +46 77-143 00 44
Faxnummer +46 40-37 48 60
info@weidmuller.se
www.weidmuller.se
- SG Singapur**
Weidmüller Pte. Ltd.
70 Bendemeer Road
04-03 Luzerne Building
Singapore 339940
Telefonnummer +65 6841 5311
Faxnummer +65 6841 5377
info@weidmuller.com.sg
www.weidmuller.com.sg
- SI Slowenien**
Elektrospoji d. o. o.
Stegne 27
SI-1000 Ljubljana
Orednjeloslovska
Telefonnummer +386 1 511 3810
Faxnummer +386 1 511 1604
info@elektrospoji.si
www.elektrospoji.si
- SK Slowakei**
ELEKTRIS s.r.o.
Elektrárėnská 1
831 04 Bratislava
Telefonnummer +421 2/4920 0113
Faxnummer +421 2/4920 0119
bratislava@elektris.sk
- SV El Salvador**
Prestegard Norte
11 Avenida Electro No. 240
Edificio Salazar No. 2
San Salvador
Telefonnummer +503 2271 1690
Faxnummer +503 2221 3851
prestegard@navegante.com.sv
- SY Syrien**
Bitte kontaktieren Sie Weidmüller Middle East FZE Vereinigte Arabische Emirate
- SZ Swasiland**
Bitte kontaktieren Sie Phambili Interface Südafrika
- TH Thailand**
Pisanu Engineering Co. Ltd.
Kwang Dingaeng, Khet Dingaeng
800/2 Soi Trakulsuk, Asok-dindaeng Road
Dindaeng, Bangkok
10400
Telefonnummer +66 2 248 2896
Faxnummer +662 105 6301
ecsales@pisanu.co.th
www.pisanu.co.th
Repräsentanz Büro
Weidmüller Pte. Ltd.
37/F, Sathorn Square Building
98 Sathorn Road
Bangkok, Silom Bangrak
10500
Telefonnummer +66 2 105 6300
Faxnummer +66 2 642 9220
info@weidmuller.com.sg
- TN Tunesien**
Bitte kontaktieren Sie Weidmüller E. U. R. L. Frankreich
- TR Türkei**
Weidmüller Elektronik Ticaret Ltd. Sirketi
Kavacik Mah. Orhan Veli Kanik
Caddesi 9/1
34810 Beykoz / Istanbul
Telefonnummer +90 (216) 537 10 70
Faxnummer +90 (216) 537 10 77
info@weidmuller.com.tr
www.weidmuller.com.tr

Adressen weltweit

Let's connect.

TW Taiwan
Weidmuller (Hong Kong)
Limited
No. 3, Lane 89, ChungYang
N. Rd.
24148 SanChuang City,
Taipei
Telefonnummer +886 921
949 751
roy.lin@weidmueller.com.hk

TZ Tansania
Bitte kontaktieren Sie
Phambili Interface
Südafrika

UA Ukraine
LLC WM UKRAINE
Levanevskogo str. 6
Kiev
3058
Telefonnummer +38 044
490 32 48
Faxnummer
info@wm-ua.com.ua
wm-ua.com.ua/

Repräsentanz Büro
Weidmueller Interface GmbH
& Co. KG
Z. office 303
7-D, Zdolbunivska str.
Kiev, 2081
Telefonnummer (Mobil) +38
050 440 25 24
info.ua@weidmueller.com

US USA
W Interconnections Inc.
821 Southlake Boulevard
Richmond Virginia 23236
Telefonnummer +1 (804)
794-2877
Faxnummer +1 (804) 379-
2593
info@weidmuller.com
www.weidmuller.com

UY Uruguay
REWO Uruguay S. A.
AV. Bolivia 2001Esq
Rocafuerte
11300 Carrasco Montevideo
Telefonnummer +598 2604
8439
Faxnummer +598 2604
8439
rewo@rewouruguay.com.uy

UZ Usbekistan
Bitte kontaktieren Sie
OOO Weidmüller
Russland

VE Venezuela
Somerinca C. A.
Corazon de Jesus - 3ra
Transversal con calle el
Carmen- Los Dos Caminos
Caracas 1070-A
Telefonnummer +58
2122352748
Faxnummer +58
2122399341
klocmoeller@cantv.net
www.somerinca.com

VN Vietnam
AUMI Industrial Equipment &
Automation Company Limited
E1, La Thanh Hotel
218 Doi Can Street
Lieu Giai Ward, Ba Dinh
District
Hanoi City
Telefonnummer +84 4
37628601
Faxnummer +84 4
62661391
aumi@aumi.com.vn
www.aumi.com.vn

Repräsentanz Büro
Weidmüller Pte. Ltd.
Level 16 Saigon Tower
Building
29 Le Duan Street
District 1
Ho Chi Minh
Telefonnummer +848 3520
7717
Faxnummer +848 3520
7604
info@weidmuller.com.sg

ZA Südafrika
Phambili Interface
PO Box 193
1609 Johannesburg, Edenvale
5 Bundo Road, Sebenza
1610 Johannesburg
Telefonnummer +27 (11)
4521930
Faxnummer
info@weidmuller.co.za
www.weidmuller.co.za

ZM Sambia
Bitte kontaktieren Sie
Phambili Interface
Südafrika

ZW Simbabwe
Bitte kontaktieren Sie
Phambili Interface
Südafrika