


**W terminal feed-through terminal
MAK 2.5 DB**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

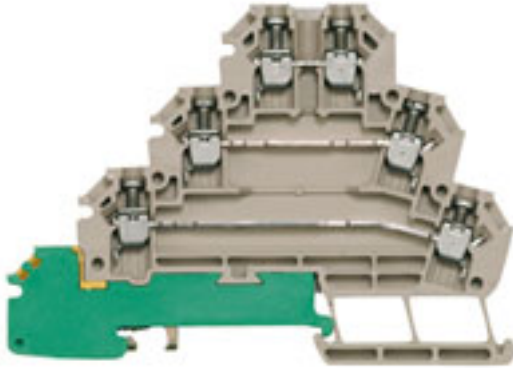

The versatile and extensive range of products - from 0.05 mm² to 300 mm² - means that you have diverse options for your applications at your disposal.

Hardened steel for mechanical strength and high-quality tinned copper for optimum conductivity. All materials comply with RoHS requirements and have been tested to current environment guidelines.

General ordering data

Order No.	7917030000
Type	MAK 2.5 DB
Version	W terminal feed-through terminal, Feed-through terminal, Rated cross-section: 2.5 mm ² , Screw connection, Wemid
GTIN (EAN)	4032248190928
Qty.	50 pc(s).

W terminal feed-through terminal MAK 2.5 DB

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

Dimensions

Length	88 mm	Width	6.2 mm
Height	63 mm	Height of lowest version	64 mm

Temperatures

Operating temperature	Storage temperature
-----------------------	---------------------

Additional technical data

Explosion-tested version	No	Open sides	right
Type of mounting	Snap-on		

CSA ratings data

Certificate No. (CSA)	12400-320	Voltage size B (CSA)	300 V
Voltage size C (CSA)	300 V	Voltage size D (CSA)	300 V
Current size B (CSA)	10 A	Current size C (CSA)	10 A
Current size D (CSA)	10 A	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min. 0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. 2.5 mm ²
---	---

Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	8 mm
Blade size	0.6 x 3.5 mm	Connection direction	on side
Number of connections	7	Clamping range, rated connection, min.	0.13 mm ²
Clamping range, rated connection, max.	4 mm ²	Clamping screw	M 2.5
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.6 Nm
Gauge to IEC 60947-1	A3	Wire connection cross section, solid core, max. rated connection	0.5 mm ²
Wire connection cross section, solid core max. rated connection	4 mm ²	Wire connection cross section, stranded, rated connection, min.	0.5 mm ²
Wire connection cross section, stranded, rated connection, max.	4 mm ²	Wire connection cross section, finely stranded, max.	4 mm ²
Wire connection cross-section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm ²	Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	2.5 mm ²		

Dimensions

TS 35 offset	28.1 mm
--------------	---------

**W terminal feed-through terminal
MAK 2.5 DB**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Technical data
Rated data

Rated cross-section	2.5 mm ²	Rated voltage	500 V
Rated impulse withstand voltage	6 kV	Rated current	24 A
Current at maximum wires	31 A	Pollution severity	3

UL ratings data

Certificate No. (UR)	E60693VOL1SEC42	Voltage size D (UR)	300 V
Current size D (UR)	10 A	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG

Material data

Material	Wemid	Colour	dark beige
Flammability class UL 94	V-0		

System specifications

Product family	W terminal feed-through terminal	Type of connection	Screw connection
Connection direction	on side	Number of levels	4
Number of connections	7	Levels cross-connected internally	No
Mounting rail	TS 35		

Classifications

ETIM 2.0	EC000897	ETIM 3.0	EC000897
ETIM 4.0	EC000897	UNSPSC	30-21-18-11
eClass 4.1	27-14-11-20	eClass 5.1	27-14-11-20
eClass 6.0	27-14-11-20		

Approvals

Approvals


Product information

Note, accessories VQB 1.5/50, see chapter "Accessories"

Downloads

 STEP [7917030000_21534_MAK_2.5_DB_STP.stp](#)
[3-D model](#)

**W terminal feed-through terminal
MAK 2.5 DB**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Drawings

