


**Connecting elements**  
**H6,0/20D GE**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 1429-0  
Fax: +49 5231 14292083  
www.weidmueller.com

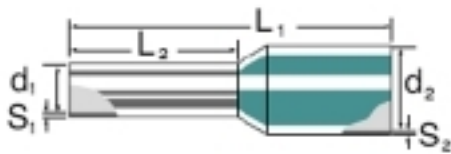

- supplied loose in poly-bag
- Weidmüller colour code
- DIN colour code
- other colour code

**General ordering data**

Type	H6,0/20D GE
Order No.	<a href="#">9019220000</a>
Version	Wire end ferrule, insulated, 14 mm, 12 mm, Yellow
GTIN (EAN)	4008190151607
Qty.	100 pc(s).
Packaging	loose

**Data sheet**

**Connecting elements  
H6,0/20D GE**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 1429-0  
 Fax: +49 5231 14292083  
 www.weidmueller.com

**Technical data**

**Dimensions and weights**

Length	20 mm	Length (inches)	0.787 inch
Net weight	0.36 g		

**Technical data**

Version	insulated
---------	-----------

**Wire-end ferrules**

Collar diameter (D2)	6.3 mm	Colour code	DIN
Conductor cross-section	6 mm <sup>2</sup>	Contact surface diameter (D1)	3.5 mm
Contact surface length (L2)	12 mm	L1 in mm	20 mm
Metal sleeve thickness (S1)	0.2 mm	Military designation	T 20A 022 A
Plastic collar thickness (S2)	0.3 mm	Stripping length	14 mm
Wire connection cross section AWG, max.	AWG 10		

**Classifications**

ETIM 3.0	EC000005	ETIM 4.0	EC000005
ETIM 5.0	EC000005	ETIM 6.0	EC000005
UNSPSC	31-16-31-02	eClass 5.1	27-40-02-01
eClass 6.2	27-40-02-01	eClass 7.1	27-40-02-01
eClass 8.1	27-40-02-01	eClass 9.0	27-40-02-01
eClass 9.1	27-40-02-01		

**Approvals**

Approvals	
-----------	---

ROHS	Conform
------	---------

**Downloads**

Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
------------------	--