


**W-Series
KDKS 1/EN4**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

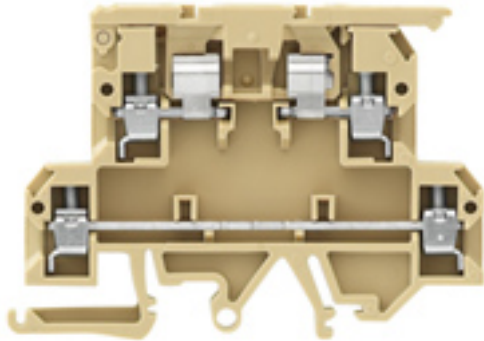

This screw-fitting product portfolio offers space-saving multi-conductor wiring plus the connection of initiators and actuators. Identical profiles enable various products to be combined if necessary, and the use of the same accessories.

Convenient marking and cross-connection options plus different variants with LED and diode components round off the range.

General ordering data

Order No.	9503350000
Type	KDKS 1/EN4
Version	W-Series, Fuse terminal, Rated cross-section: 4 mm ² , Screw connection, PA 66, Direct mounting
GTIN (EAN)	4008190550806
Qty.	50 pc(s).

W-Series
KDKS 1/EN4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	73.5 mm	Width	8 mm
Height	65 mm	Net weight	22.2 g

Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	100 °C

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on	Version	Screw connection, Fuse isolator, One end without connector

CSA ratings data

Certificate No. (CSA)	12400-281	Voltage size D (CSA)	300 V
Current size D (CSA)	10 A	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	4 mm ²
---	---------------------	---	-------------------

Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	9 mm
Blade size	0.6 x 3.5 mm	Connection direction	on side
Number of connections	3	Clamping range, rated connection, min.	0.33 mm ²
Clamping range, rated connection, max.	4 mm ²	Clamping screw	M 3
Tightening torque, min.	0.5 Nm	Tightening torque, max.	1 Nm
Torque level with DMS electric screwdriver	2	Gauge to IEC 60947-1	A3
Wire connection cross section, solid core, max. rated connection	0.5 mm ²	Wire connection cross section, solid core max. rated connection	4 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	4 mm ²
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	4 mm ²
Wire connection cross section AWG, min.	AWG 22	Wire connection cross section AWG, max.	AWG 12

Rated data

Rated cross-section	4 mm ²	Rated voltage	500 V
Rated impulse withstand voltage	6 kV	Rated current	6.3 A
Current at maximum wires	6.3 A	Standards	IEC 60947-7-1 (-7-2)
Pollution severity	3		

W-Series
KDKS 1/EN4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**UL ratings data**

Certificate No. (UR)	E60693VOL1SEC18	Voltage size C (UR)	300 V
Current size C (UR)	10 A	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG

Material data

Insulating material	PA 66	Material	PA 66
Colour	Beige	UL 94 flammability rating	V-2

System specifications

Product family	W-Series	Type of connection	Screw connection
Connection direction	on side	Number of levels	2
Number of connections	3	Levels cross-connected internally	No
End cover plate required	Yes		

Classifications

ETIM 3.0	EC000899	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-16	eClass 6.2	27-14-11-20
eClass 7.1	27-14-11-20		

Approvals

Approvals



ROHS Conform

DownloadsSTEP [9503350000_60044_KDKS1-EN4_STP.stp](#)