

MICROSERIES

MRZ 120Vuc 1CO

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

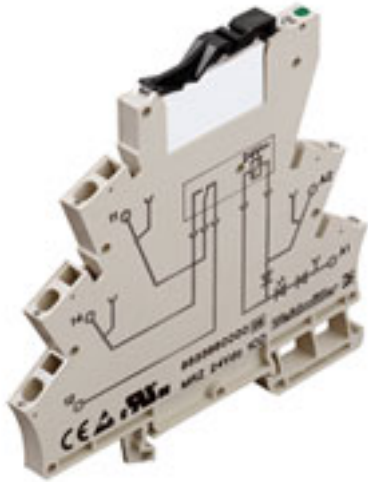

Relays of the MICROSERIES are used for isolating and coupling digital signals.

They are characterised by the following features:

- modular width 6.1 mm
- Pluggable relay
- Pluggable cross-connection for four voltages in input and output circuits,
- innovative retention and ejection aid,
- LED operating indicator, reverse polarity protection diode, free-wheeling diode

General ordering data

Order No.	8556100000
Type	MRZ 120Vuc 1CO
Version	MICROSERIES, Relays, No. of contacts: 1, CO contact, AgNi, Rated control voltage: 120 V UC +10 % / -15 %, Continuous current: 6 A, Tension clamp connection
GTIN (EAN)	4032248195329
Qty.	10 pc(s).

MICROSERIES
MRZ 120Vuc 1CO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	6.1 mm	Height	94 mm
Depth	94 mm	Net weight	33.4 g

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature	-25 °C...+55 °C
Storage temperature	-40 °C...+60 °C		

Input

Protective circuit	Rectifier	Rated control voltage	120 V UC +10 % / -15 %
Rated current AC	3.5 mA ±15 %	Rated current DC	3.5 mA ±15 %
Power rating	0.42 VA, 360 mW	Response / drop-out voltage AC coil	60 V / 37 V
Pull-in (sparkover) / drop-out voltage DC coil	60 V / 21 V	Pull-in / drop-out current, AC coil	1.8 mA / 1.1 mA
Pull-in / drop-out current, DC coil	1,8 mA / 0,5 mA	Status indicator	Green LED

Output

Rated switching voltage	250 V AC	Max. switching voltage, AC	250 V
Max. switching voltage, DC	250 V	Continuous current	6 A
Making current	6 A	Max. switching power	1500 VA
Switch-on delay	< 9 ms	Switch-off delay	≤ 9 ms
Min. switching power	100 mA / 5 V, 10 V / 10 mA, 24 V / 1 mA	Max. switching frequency at rated load	0.1 Hz

Contact specifications

No. of contacts	1	Contact design	CO contact
Contact material	AgNi	Mechanical service life	20 x 10 ⁶ switching cycles

general data

Wire connection method	Tension clamp connection	Humidity	40 °C / 93 % rel. humidity, no condensation
------------------------	--------------------------	----------	--

Insulation coordination

Creepage and clearance distance input – output	≥ 5.5 mm	Rated voltage	300 V
Dielectric strength to mounting rail	4 kV _{eff} / 1 min.	Impulse withstand voltage	4 kV (1.2/50 μs)
Protection degree	IP 20	Pollution severity	2
Surge voltage category	III		

Other technical data

Version	Relay coupler	Protective circuit	Rectifier
Status indicator	Green LED		

Further details of approvals / standards

Standards	DIN EN 50178
-----------	--------------

**MICROSERIES
MRZ 120Vuc 1CO**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Connection data

Clamping range, rated connection	1.5 mm ²	Clamping range, rated connection, max.	2.5 mm ²
Clamping range, rated connection, min.	0.5 mm ²	Wire connection method	Tension clamp connection

Classifications

ETIM 3.0	EC001437	eClass 6.2	27-37-16-01
eClass 7.1	27-37-16-01		

Approvals

Approvals



ROHS Conform

Downloads


Declaration of Conformity [K205_09_09.pdf](#)
[3-D model](#)

**MICROSERIES
MRZ 120Vuc 1CO**


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings


Electric symbol

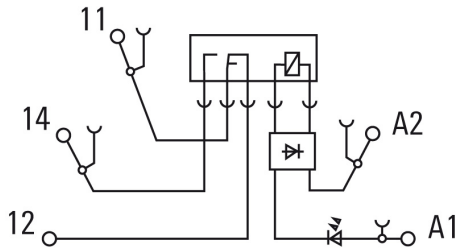


DC load breaking capacity

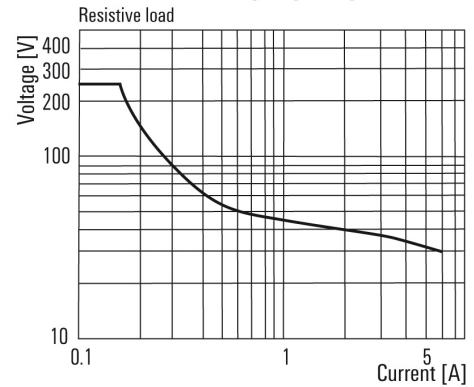

Electrical endurance

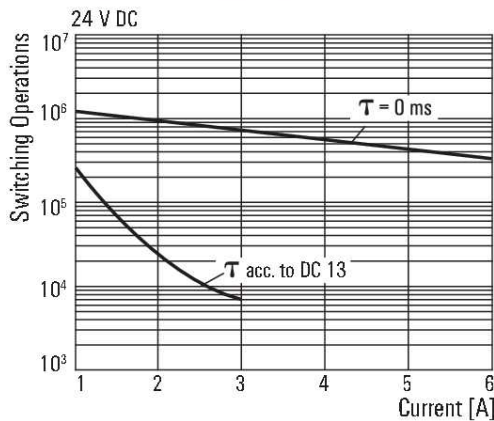

Electrical endurance

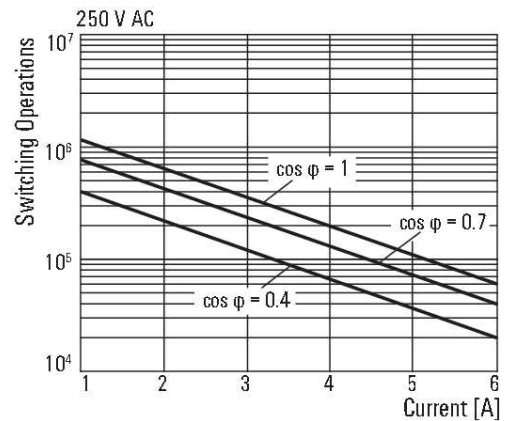

Derating curve

